


Smooth Press-Fit Solder-Pins (r)


are made and cut from drawn wire. The cut cross-sections are bare. This pin is preferred when pinning small quantities of components, in particular pin-bases and potting-boxes.

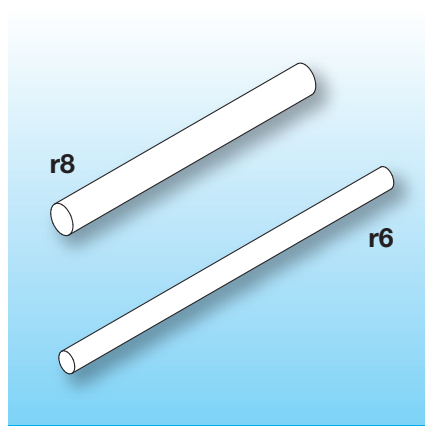

The material of the pins is tin bronze CuSn 6, subsequently tinned. They are cut to length (incremental steps of 1 mm/0.039 inch). Special lengths or material on request, dimensions in mm/inch.

When ordering please quote type and order-code.

Shape	Type	Order-Code	G
r6	r606/ua	77206-212	6.0 / 0.236
	r607/ua	77207-212	7.0 / 0.276
	r608/ua	77208-212	8.0 / 0.315
	r609/ua	77209-212	9.0 / 0.354
	r610/ua	77210-212	10.0 / 0.394
	r611/ua	77211-212	11.0 / 0.433
	r612/ua	77212-212	12.0 / 0.472
	r613/ua	77213-212	13.0 / 0.512
	r614/ua	77214-212	14.0 / 0.551
	r615/ua	77215-212	15.0 / 0.591
	r616/ua	77216-212	16.0 / 0.630



shape	Ø D
r6	0.60 / 0.024
r8	0.80 / 0.031
r1	1.00 / 0.039
r2	1.20 / 0.047

Stand 07/2015 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America


Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

Smooth Press-Fit Solder-Pins (r)



are made and cut from drawn wire. The cut cross-sections are bare. This pin is preferred when pinning small quantities of components, in particular pin-bases and potting-boxes.

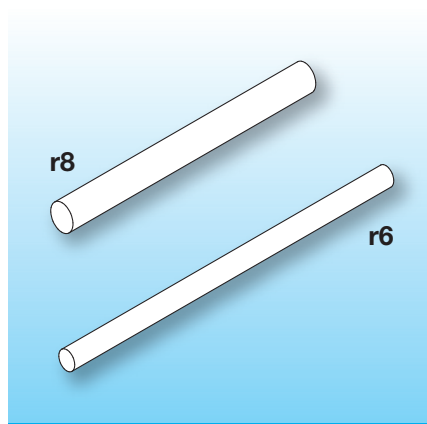

The material of the pins is tin bronze CuSn 6, subsequently tinned. They are cut to length (incremental steps of 1 mm/0.039 inch). Special lengths or material on request, dimensions in mm/inch.

When ordering please quote type and order-code.

Shape	Type	Order-Code	G
r8	r806/ua	77306-212	6.0 / 0.236
	r807/ua	77307-212	7.0 / 0.276
	r808/ua	77308-212	8.0 / 0.315
	r809/ua	77309-212	9.0 / 0.354
	r810/ua	77310-212	10.0 / 0.394
	r811/ua	77311-212	11.0 / 0.433
	r812/ua	77312-212	12.0 / 0.472
	r813/ua	77313-212	13.0 / 0.512
	r814/ua	77314-212	14.0 / 0.551
	r815/ua	77315-212	15.0 / 0.591
	r816/ua	77316-212	16.0 / 0.630
	r819/ua	77319-212	19.0 / 0.748
	r8195/ua	77359-212	19.5 / 0.768
	r821/ua	77321-212	21.0 / 0.827
	r824/ua	77324-212	24.0 / 0.945
	r826/ua	77326-212	26.0 / 1.024
	r831/ua	77331-212	31.0 / 1.220
	r836/ua	77336-212	36.0 / 1.417
	r841/ua	77341-212	41.0 / 1.614



shape	Ø D
r6	0.60 / 0.024
r8	0.80 / 0.031
r1	1.00 / 0.039
r2	1.20 / 0.047

Stand 07/2015 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America


Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

Smooth Press-Fit Solder-Pins (r)



are made and cut from drawn wire. The cut cross-sections are bare. This pin is preferred when pinning small quantities of components, in particular pin-bases and potting-boxes.

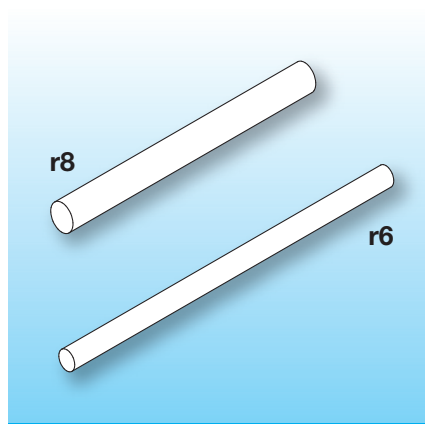

The material of the pins is tin bronze CuSn 6, subsequently tinned. They are cut to length (incremental steps of 1 mm/0.039 inch). Special lengths or material on request, dimensions in mm/inch.

When ordering please quote type and order-code.

Shape	Type	Order-Code	G
r1	r108/ua	77408-212	8.0 / 0.315
	r109/ua	77409-212	9.0 / 0.354
	r110/ua	77410-212	10.0 / 0.394
	r111/ua	77411-212	11.0 / 0.433
	r112/ua	77412-212	12.0 / 0.472
	r113/ua	77413-212	13.0 / 0.512
	r114/ua	77414-212	14.0 / 0.551
	r115/ua	77415-212	15.0 / 0.591
	r116/ua	77416-212	16.0 / 0.630
	r117/ua	N0624-212	on request 17.0 / 0.669
	r118/ua	N0625-212	on request 18.0 / 0.709
	r119/ua	N0626-212	on request 19.0 / 0.748
	r120/ua	N0627-212	on request 20.0 / 0.787
	r121/ua	77421-212	21.0 / 0.827



shape	Ø D
r6	0.60 / 0.024
r8	0.80 / 0.031
r1	1.00 / 0.039
r2	1.20 / 0.047

Stand 07/2015 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America


Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

Smooth Press-Fit Solder-Pins (r)


are made and cut from drawn wire. The cut cross-sections are bare. This pin is preferred when pinning small quantities of components, in particular pin-bases and potting-boxes.

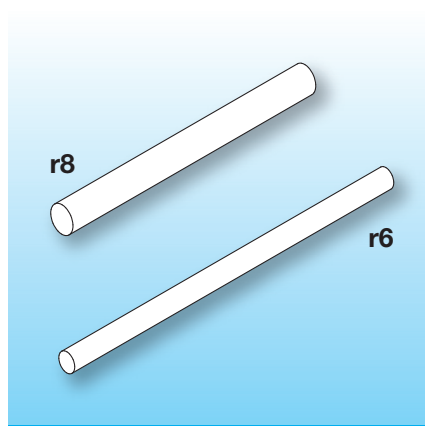

The material of the pins is tin bronze CuSn 6, subsequently tinned. They are cut to length (incremental steps of 1 mm/0.039 inch). Special lengths or material on request, dimensions in mm/inch.

When ordering please quote type and order-code.

Shape	Type	Order-Code		G
r2	r212/ua	N0613-212	on request	12.0 / 0.472
	r213/ua	N0618-212	on request	13.0 / 0.512
	r214/ua	N0619-212	on request	14.0 / 0.551
	r215/ua	N0620-212	on request	15.0 / 0.591
	r216/ua	N0621-212	on request	16.0 / 0.630
	r217/ua	N0622-212	on request	17.0 / 0.669
	r218/ua	N0623-212	on request	18.0 / 0.709



shape	Ø D
r6	0.60 / 0.024
r8	0.80 / 0.031
r1	1.00 / 0.039
r2	1.20 / 0.047

Stand 07/2015 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu