


P-EE Pick and Place Caps

The Pick and Place Caps are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch).

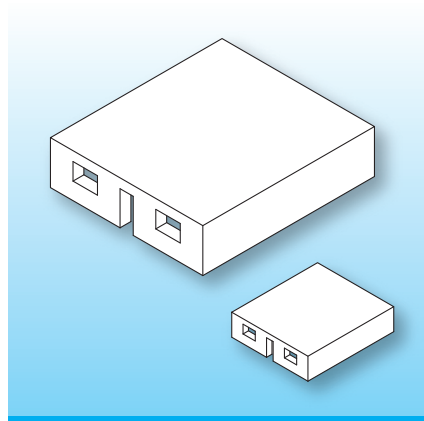


The Pick and Place Caps for the range EE 5 – EE 16 allow automatic board assembly. They are designed to fit the top of the flanges of the SMD coilformers via a snap-on facility.

When ordering please quote type and order-code.

Type	Order-Code	A	B	C	I
P-EE 5/torA504*	67020-132	4.7 / 0.185	4.7 / 0.185	1.5 / 0.059	0.5 / 0.020
P-EE 8.8/torA504	67024-132	5.1 / 0.201	5.8 / 0.228	1.5 / 0.059	0.5 / 0.020
P-EE 10/torA504	67022-132	7.9 / 0.311	8.1 / 0.319	2.3 / 0.091	0.5 / 0.020
P-EE 12.6/torA504	67023-132	9.7 / 0.382	9.9 / 0.390	2.8 / 0.110	0.5 / 0.020
P-EE 16/torA504	67025-132	12.0 / 0.472	12.3 / 0.484	3.0 / 0.118	0.5 / 0.020

* P-EE 5 suitable for coilformer EE 6.3

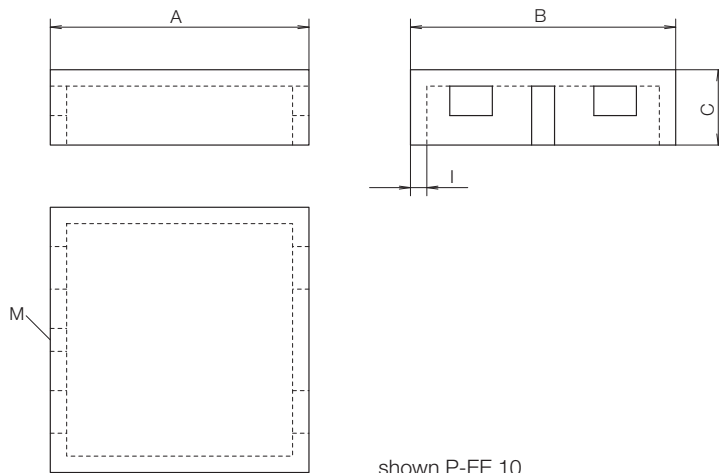

15 C 2 M / 15 C 3 S / 15 C 3 S / 15 C 2 G / 15 B 2 G

© 08/2018 by NORWE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland
Telefon +49 (0) 27 63-807-0
Telefax +49 (0) 27 63-807-77
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America
Telefon +1-330 497-8113
Telefax +1-330 305-0592
E-mail usa@norwe.com
Internet www.norwe.com



Valid version of
data sheet online

QR Online-Version