


P-EE Pick and Place Caps

The Pick and Place Caps are made in gfr Polyphenylene Sulfide PPS of type torA504 (RTI long-range temperature +130°C) and are suitable for reflow soldering. Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/*inch*).

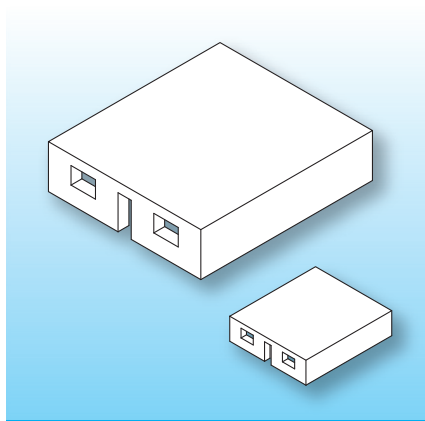


The Pick and Place Caps for the range EE 5 – EE 16 allow automatic board assembly. They are designed to fit the top of the flanges of the SMD coilformers via a snap-on facility.

When ordering please quote type and order-code.

Type	Order-Code		A	B	C	I
P-EE 5/torA504*	67020-132		4.7 / 0.185	4.7 / 0.185	1.5 / 0.059	0.5 / 0.020
P-EE 8/torA504	67021-132		6.5 / 0.256	6.7 / 0.264	2.0 / 0.079	0.5 / 0.020
P-EE 8.8/torA504	67024-132		5.1 / 0.201	5.8 / 0.228	1.5 / 0.059	0.5 / 0.020
P-EE 10/torA504	67022-132		7.9 / 0.311	8.1 / 0.319	2.3 / 0.091	0.5 / 0.020
P-EE 12.6/torA504	67023-132		9.7 / 0.382	9.9 / 0.390	2.8 / 0.110	0.5 / 0.020
P-EE 16/torA504	67025-132		12.0 / 0.472	12.3 / 0.484	3.0 / 0.118	0.5 / 0.020
P-EE 20/torA504	N0527-132	 on request	15.0 / 0.591	15.3 / 0.602	3.0 / 0.118	0.6 / 0.024

* P-EE 5 suitable for coilformer EE 6.3

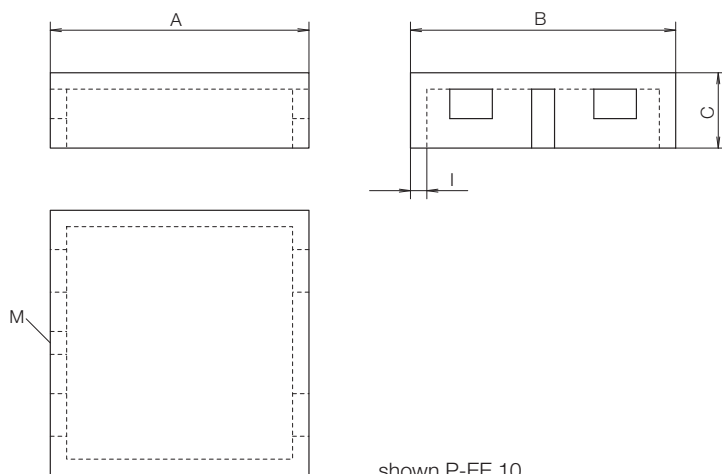

Stand 03/2014 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu