


EC Coilformers, Horizontal

The coilformers are made in gfr Polyamide PA66 of Type p6g (RTI long-range temperature +125°C). Pin material is tin bronze, tinned for solder-pins and brass, tinned for solder-tags.


Maximum solder temperature 350°C, 2 sec.

Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

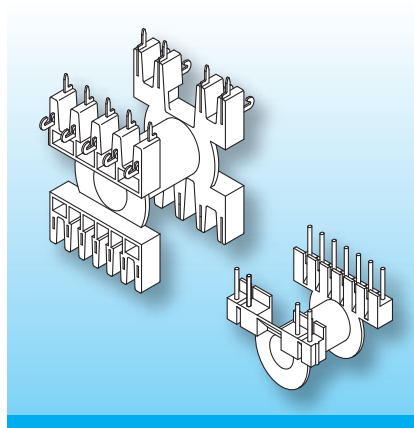


The coilformers are suitable for automatic winding on computer controlled machines. They are available with solder-pins in two different diameters. The coilformers have plastic stand-offs thus eliminating cold solder-joints when soldering into the pcb.

Type	Order-Code	Accessories
Coilformer: EC 52/ec-/hv/p6g Solder-tag: ech/wd	90216-024 75403-261	Clip FK-EC 52

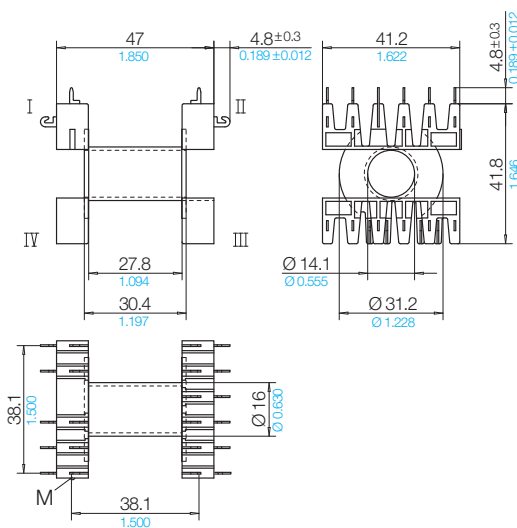

Grid

View tag-side

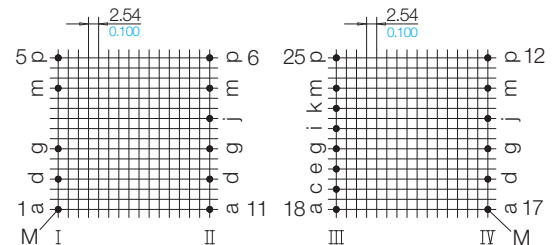

Stand 12/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America


Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com

EC Coilformers, Vertical

The coilformers are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125°C). Pin material is tin bronze, tinned for solder-pins and brass, tinned for solder-tags.



Maximum solder temperature 350°C, 2 sec.

Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

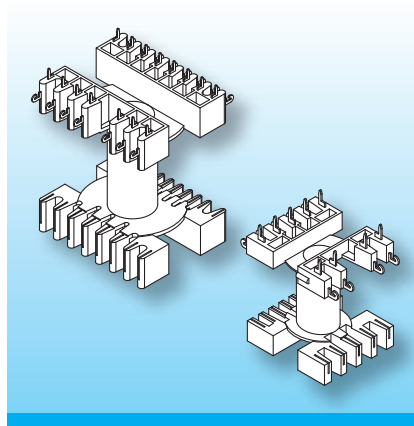


The coilformers are suitable for automatic winding on computer controlled machines. The EC solder-tags are for side-wrapping and soldering. Since the lower ends of the solder-tags fit cleanly into the pcb, cold solder-joints are eliminated.

Type	Order-Code	Accessories
Coilformer: EC 52/ec-/hv/p6g Solder-tag: ecv/wd	90216-024 75401-261	Clip FK-EC 52

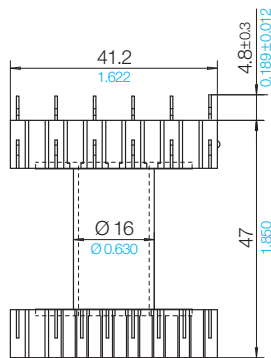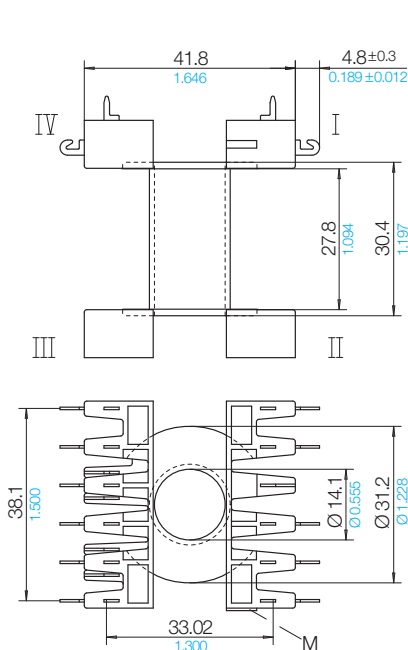

Grid View tag-side

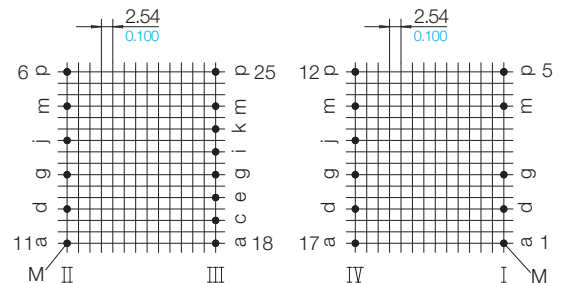

Stand 12/2011 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com