



## M 20 – M 55 Vertical

The coilformers are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125° C) and A RV250 nat. (RTI long-range temperature +100° C).  
Pin material is tin bronze, tinned.  
Max. solder temperature +350° C, 2 sec.  
Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

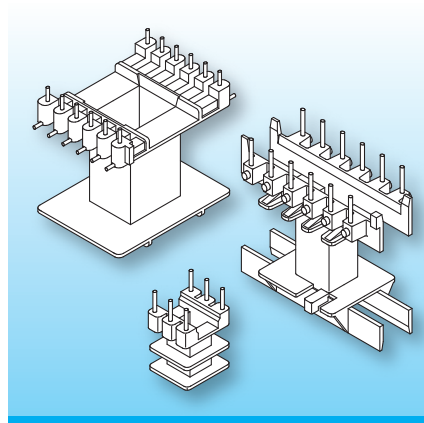


This group of vertical coilformers is sorted by ferrite core / lamination size and each by pinning with straight pins and side-wrapping pins. Most designs feature terminal strips with “noses” which provide tension-relief of the winding wires and “stand-offs” which allow clean soldering of the coilformer onto the pcb to minimize cold-solder joints. Some coilformers also feature extended flanges to prevent clips sliding off.

Type	Order-Code	Accessories
Coilformer: M 30a/1k/9-8/7.5-gf/A RV250 nat.	00630-106	Latching-Clip FB-E 30
Coilformer: M 30a/2k/9-8/7.5-gf/A RV250 nat.	00631-106	Spring-Clip SB-E 30
Solder-pin: z809/ua	73295-212	

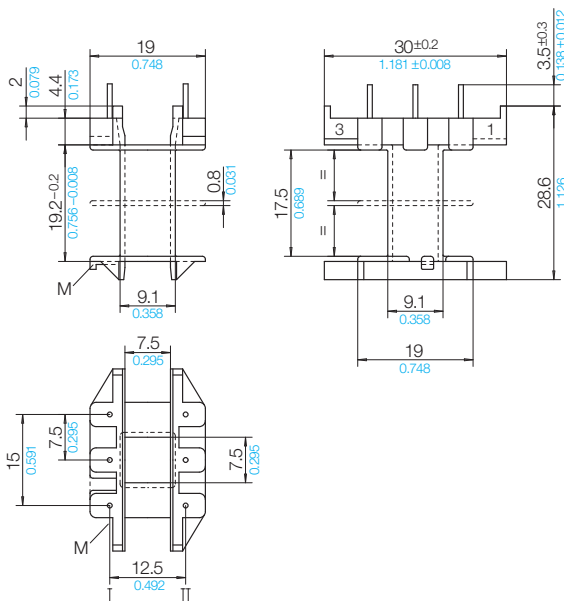

### Grid View pin-side



01 B 2 G / 01 B 2 S

### © 07/2018 by NORWE GmbH

Warranties:  
refer to Terms and Conditions of Sale

### NORWE GmbH

Postfach 13 56  
51691 Bergneustadt  
Paulstraße 5, Pernze  
51702 Bergneustadt  
Deutschland  
Telefon +49 (0) 27 63-807-0  
Telefax +49 (0) 27 63-807-77  
E-mail verkauf@norwe.de  
Internet www.norwe.de  
www.norwe.eu

### NORWE Inc.

P.O. Box 25 11  
North Canton, OH 44720-0511  
United States of America  
Telefon +1-330 497-8113  
Telefax +1-330 305-0592  
E-mail usa@norwe.com  
Internet www.norwe.com



Valid version of  
data sheet online

QR Online-Version