


M 20 – M 74 / E 70 – E 80

Horizontal Coilformers

The coilformers are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125° C) and x2g5 (RTI long-range temperature +120° C).

Pin material is tin bronze, tinned for solder-pins and brass, tinned for solder-tags.


Max. solder temperature +350° C,
2 sec. Special materials – e.g.
irradiated cross-linked – and designs
on request, dimensions in mm/*inch*.

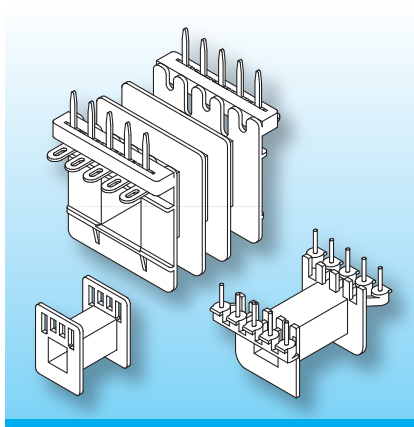

This group of horizontal coilformers is sorted by ferrite core / lamination size and each by pinning with straight pins, side-wrapping pins, solder-tags and conventional coilformers.

Most designs feature terminal strips with “noses” which provide tension-relief of the winding wires and “stand-offs” which allow clean soldering of the coilformer onto the pcb to minimize cold-solder joints. Some coilformers also feature extended flanges to prevent clips sliding off.

Type	Order-Code	Accessories
Coilformer: M 30a/1k/7-8/5.0-kk/p6g	00720-024	Potting Box M 30
Coilformer: M 30a/2k/7-8/5.0-kk/p6g	00721-024	Snap-on Cap M 30
Solder-pin: z810/ua	73296-212	Latching-Clip FB-E 30
		Spring-Clip SB-E 30

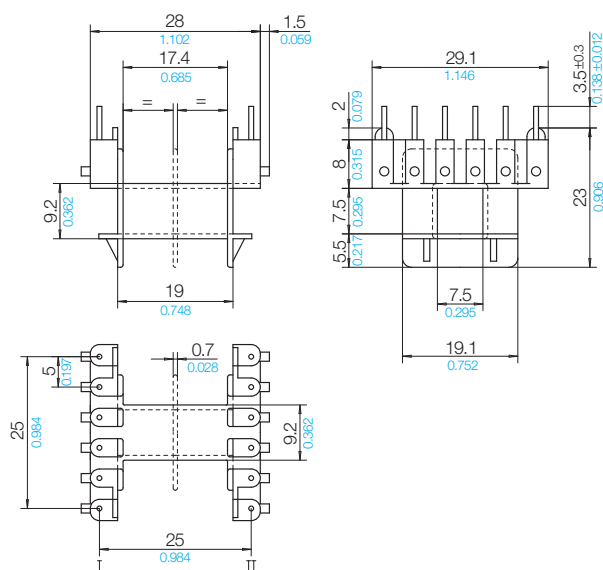

Grid
View pin-side

