Triple Section PC Coilformers

The coilformers are made in clear Polycarbonate of type pk3 (RTI long-range temperature +115°C). Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.

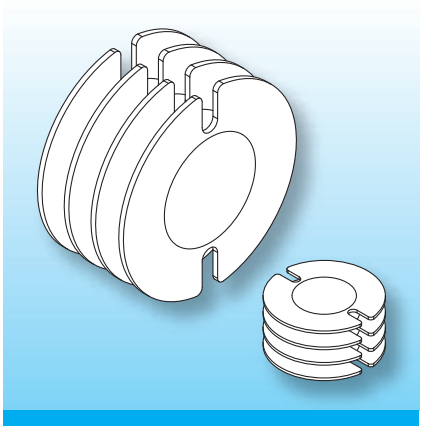

The coilformers – dimensions adopted from DIN EN 60133 (DIN 41294) – can be used designing low leakage inductors and are available for PC size 14 x 8 mm (0.551 x 0.315 inch) up to 47 x 28 mm (1.85 x 1.102 inch).

Type	Order-Code	A	C	D	E	G	H
C 14 x 8 / pk3	11112-065	11.5 0.453	6.1 0.240	7.1 0.280	2.0 0.079	5.4 0.213	1.2 0.047
C 18 x 11 / pk3	11122-065	14.8 0.583	7.7 0.303	8.8 0.346	2.0 0.079	7.0 0.276	1.7 0.067
C 22 x 13 / pk3	11142-065	17.8 0.701	9.6 0.378	10.8 0.425	2.5 0.098	9.0 0.354	2.2 0.087
C 26 x 16 / pk3	11152-065	20.9 0.823	11.7 0.461	12.9 0.508	2.5 0.098	10.8 0.425	2.8 0.110
C 30 x 19 / pk3	11162-065	24.8 0.976	13.7 0.539	15.0 0.591	3.0 0.118	12.8 0.504	3.4 0.134
C 36 x 22 / pk3	11182-065	29.5 1.161	16.5 0.650	17.9 0.705	3.0 0.118	14.4 0.567	3.7 0.146
C 41 x 25 / pk3	11192-065	33.6 1.323	17.7 0.697	19.5 0.768	3.0 0.118	16.7 0.657	4.3 0.169
C 47 x 28 / pk3	11202-065	37.3 1.469	20.2 0.795	21.9 0.862	3.3 0.130	18.8 0.740	5.2 0.205

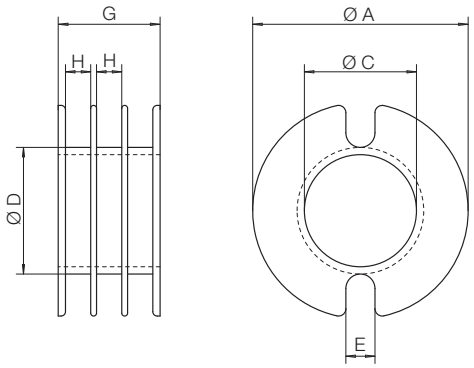

© 02/2012 by NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Paulstraße 5, Pernze
51702 Bergneustadt

Deutschland

Telefon +49 (0) 2763-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511

United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com