


EFD – Coilformers with z8 Solder-pins

The coilformers are made in gfr Polyamide PA66 of type A3X2G10 (RTI long-range temperature +115°C).

Pin material: tin bronze, tinned.



Maximum solder temperature 350°C, 2 sec.

Special materials – e.g. irradiated cross-linked – and designs on request, dimensions in mm/inch.


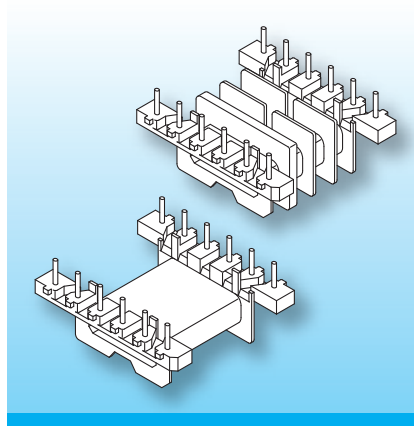


The coilformers are fitted with straight, sturdy z8 pins. Binding-on of the wires is axially. The pins are suitable for windings with thick wire. The terminal strips usually feature “noses” which provide tension-relief, and “stand-offs” which allow clean soldering of the wires and of the coilformer onto the pcb.

Type	Order-Code	Accessories
Coilformer: EFD 30/1k/12-8/2.5/A3X2G10	94327-181	Potting Box EFD 30
Coilformer: EFD 30/1-3ks/12-8/2.5/A3X2G10	N0189-181 	
Solder-pin: z808/ua	73294-212	
Solder-pin: z809/ua	73295-212	

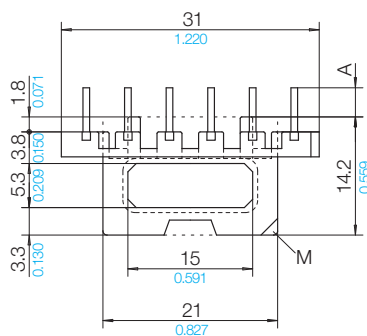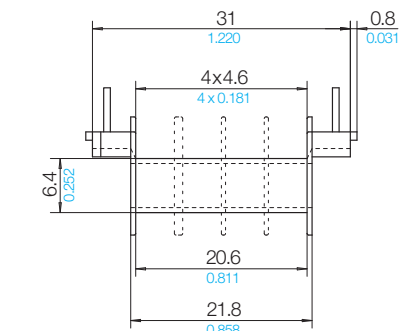

Grid
View pin-side

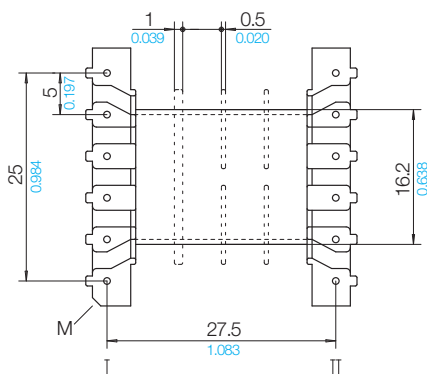

z808 $A=3.5\pm0.3/0.138\pm0.012$
without Potting Box

z809 $A=4.5\pm0.3/0.177\pm0.012$
for Potting Box

Stand 01/2012 | © 2026 NORWE ONE GmbH

All dimensions in mm/inch

The permissible deviations according to DIN 16901 apply as tolerances

Warranties:
refer to Terms and Conditions of Sale

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE ONE GmbH

51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

NORWE Inc.

North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com