



Potting Boxes

The boxes are made in gfr Poly-
amide PA66 of type p6g (RTI long-
range temperature +125 °C) and
CR-A3H2G6, black (RTI long-range
temperature +110 °C).
Special materials and designs on
request, dimensions in mm/[inch](#).

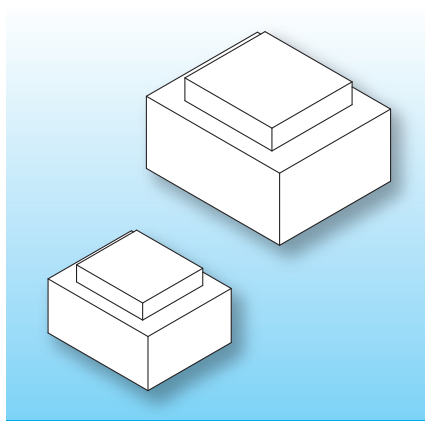

The potting boxes can be used
to your special requirements.
In particular they are suitable for
potting safety transformers of the
EJ series to meet required creepage
and clearance dimensions. Should
you need more detailed information
please ask for our catalogues.
To process your order correctly
please indicate type of potting box
and order-code.

Type	Order-Code	A	B	C	D	E	F	G	H	I
EJ 30/Mc/14.0/p6g	04830-024	32.4 1.276	27.4 1.079	14.8 0.583	4.0 0.157	25.8 1.016	30.8 1.213	22.8 0.898	20.8 0.819	0.8 0.031
EJ 30/Mc/16.0/p6g	04831-024	32.4 1.276	27.4 1.079	16.8 0.661	4.0 0.157	25.8 1.016	30.8 1.213	22.8 0.898	20.8 0.819	0.8 0.031
EJ 30/Mc/19.5/p6g	04832-024	32.4 1.276	27.4 1.079	20.3 0.799	4.0 0.157	25.8 1.016	30.8 1.213	22.8 0.898	20.8 0.819	0.8 0.031
EJ 30/Mc/21.5/p6g	04833-024	32.4 1.276	27.4 1.079	22.3 0.878	4.0 0.157	25.8 1.016	30.8 1.213	22.8 0.898	20.8 0.819	0.8 0.031
EJ 30/Mc/23.5/p6g	04834-024	32.4 1.276	27.4 1.079	24.3 0.957	4.0 0.157	25.8 1.016	30.8 1.213	22.8 0.898	20.8 0.819	0.8 0.031
EJ 30/Mc/24.0/p6g	04820-024	32.4 1.276	27.4 1.079	24.8 0.976	4.0 0.157	25.8 1.016	30.8 1.213	22.8 0.898	20.8 0.819	0.8 0.031
EJ 30/Mc/26.5/p6g	04899-024	32.4 1.276	27.4 1.079	27.3 1.075	4.0 0.157	25.8 1.016	30.8 1.213	22.8 0.898	20.8 0.819	0.8 0.031

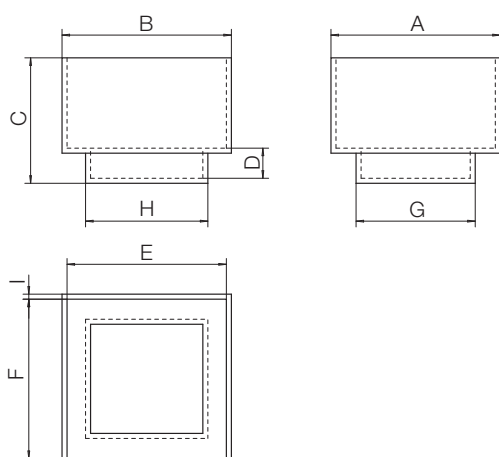

Stand 07/2016 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com




Valid version of
data sheet online

QR Online-Version


Potting Boxes

The boxes are made in gfr Polyamide PA66 of type p6g (RTI long-range temperature +125 °C) and CR-A3H2G6, black (RTI long-range temperature +110 °C). Special materials and designs on request, dimensions in mm/[inch](#).

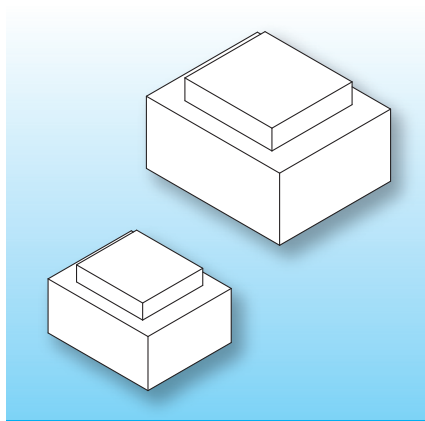

The potting boxes can be used to your special requirements. In particular they are suitable for potting safety transformers of the EJ series to meet required creepage and clearance dimensions. Should you need more detailed information please ask for our catalogues. To process your order correctly please indicate type of potting box and order-code.

Type	Order-Code	A	B	C	D	E	F	G	H	I
EJ 30/vlc/29.0/p6g	04835-024	32.4 1.276	27.4 1.079	29.8 1.173	4.0 0.157	25.8 1.016	30.8 1.213	22.8 0.898	20.8 0.819	0.8 0.031
EJ 38/vlc/29.8/p6g	05197-024	41.0 1.614	35.0 1.378	30.6 1.205	5.7 0.224	33.4 1.315	39.4 1.551	29.6 1.165	25.2 0.992	0.8 0.031
EJ 38/vlc/31.5/p6g	05195-024	41.0 1.614	35.0 1.378	32.3 1.272	5.9 0.232	33.4 1.315	39.4 1.551	28.7 1.130	24.8 0.976	0.8 0.031
EJ 42/vlc/31.5/p6g	05490-024	43.8 1.724	37.0 1.457	32.3 1.272	6.2 0.244	35.4 1.394	42.2 1.661	32.0 1.260	27.7 1.091	0.8 0.031
EJ 42/vlc/32.5/p6g	05495-024	45.0 1.772	38.0 1.496	33.3 1.311	7.4 0.291	36.2 1.425	43.2 1.701	30.0 1.181	28.0 1.102	0.9 0.035
EJ 48/vlc/37.0/p6g	05795-024	51.0 2.008	43.0 1.693	38.0 1.496	6.6 0.260	41.0 1.614	49.0 1.929	33.6 1.323	30.2 1.189	1.0 0.039
EJ 54/vlc/38.2/CR-A3H2G6,sw	06195-134	56.0 2.205	47.0 1.850	38.8 1.528	7.0 0.276	45.4 1.787	54.4 2.142	37.4 1.472	33.4 1.315	0.8 0.031

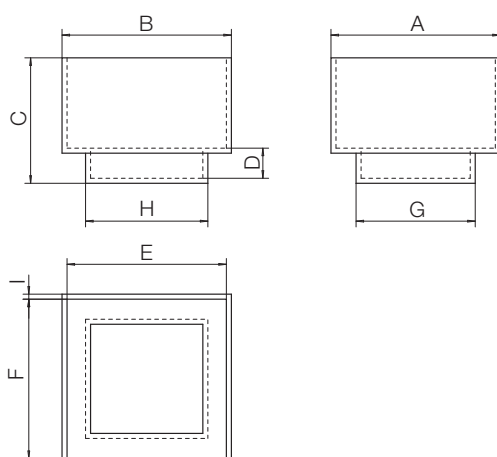

Stand 07/2016 | © 2026 NORWE ONE GmbH

Warranties:
refer to Terms and Conditions of Sale

NORWE ONE GmbH

Postfach 13 56
51691 Bergneustadt
Paulstraße 5, Pernze
51702 Bergneustadt
Deutschland

Telefon +49 (0) 27 63-807-0
WhatsApp +49 2763 807-0
E-mail verkauf@norwe.de
Internet www.norwe.de
www.norwe.eu

NORWE Inc.

P.O. Box 25 11
North Canton, OH 44720-0511
United States of America

Telefon +1-330 497-8113
E-mail usa@norwe.com
Internet www.norwe.com



Valid version of
data sheet online

QR Online-Version